



SPECIFICATIONS

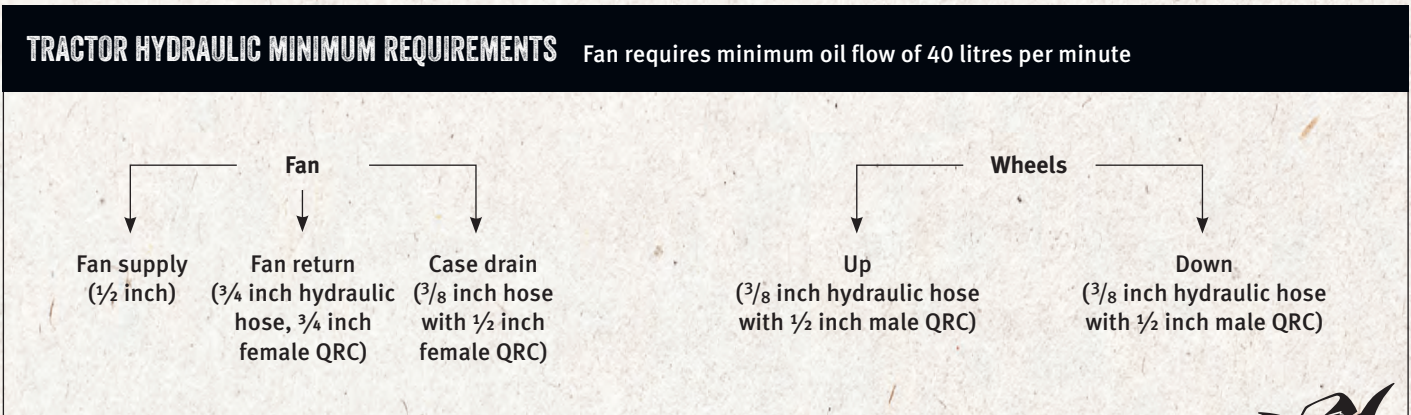

DIMENSIONS	23 ROW / 3 METRE	27 ROW / 3.5 METRE
Width - over wheels (mm)	3070	3570
Height - ground wheels up - over the hand rails (mm)	2300	2300
Length - overall - press wheels fitted (mm)	4100	4100
Weight - with press wheels fitted (kg)	2700	3000
Row spacing (mm)	125	125
Sowing width - effective (mm)	2875	3375
Hopper capacity (Litres)	700 each side	700 each side

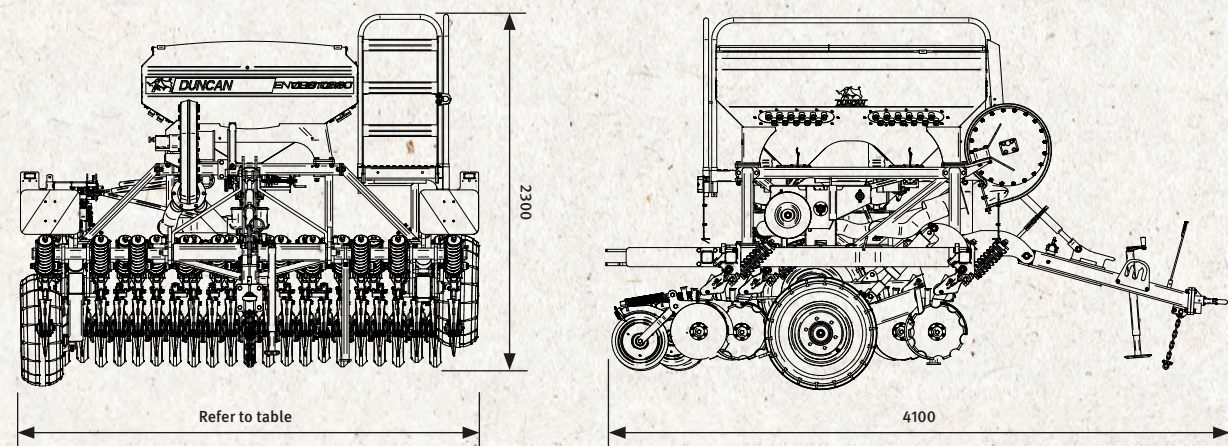

DUNCAN AG NEW ZEALAND

100 Hilton Highway,
Washdyke 7910, Timaru
Ph: 0800 177 171
Email: admin@duncanag.co.nz

www.duncanag.com

DUNCAN AG AUSTRALIA

4B Silverton Close,
Laverton North, Victoria 3026
Ph: 03 9314 9666
Email: admin@duncanag.com.au

In accordance with the company's policy of continuous improvement to its machines, alterations in specifications may be made without notice. The company accepts no responsibility for any discrepancies which may occur between specifications of its machines and the descriptions thereof contained in this publication.

ENVIRO DD30



Time/disc:
Disc drill



Distribution:
Air



Suitable for:
Medium/large farms and contractors



ENVIRO DD30

The Enviro DD30 has a double disc setup with a unique scalloped disc which leads a plain disc to open up the seeding slot. This machine will give excellent ground penetration and trash handling ability whilst delivering seed evenly on all terrain. An extensive list of options including press wheels make this a very versatile machine.



AIR DELIVERY FOR OPTIMUM RESULTS

The Duncan DD30 has a double disc setup which makes it ideal for drilling into rocky conditions and through trash. Each individual spring mounted disc assembly will follow the contours and ride up and over rocks and other obstacles whilst continuing to sow the seed evenly across the rest of the drill. The leading scalloped disc cuts up the trash and creates a tilth, an ideal seedbed for the seed to be placed in. The air delivery system ensures the seed will be delivered to the ground evenly in the steepest conditions.

BUY WITH CONFIDENCE

Duncan have been making farm equipment since 1865. We understand the need for strength, reliability and value for money. Purchase a Duncan and become part of the legend.



Large access platform with safety rails

Fully powder coated chassis and hopper

20mm shanks supporting the double disc unit for maximum strength

Discs have triple seal bearings



Australian-made hydraulic fan requiring 40L/min. oil flow

Easy access to calibration units

A positive drive via an adjustable ground-driven jockey wheel

Adjustable spring head with bushes for longevity

GENUINE DUNCAN FACTORY OPTIONS

Duncan offers a wide variety of genuine factory extras. Installed by the same team of experts that make all of our equipment, you can be assured all parts are of the highest quality and will stand up to the most demanding conditions.

300L hopper extension

Press wheels

Rear tow bar

Heat exchanger/drier

Tine harrows

Jack stand

Lighting kit

Uniroller

Electric drive

Single hopper (seed only)

Small seeds box

Hydraulic drawbar ram

Self loading crane

End tow kit

Wide wheel option

Weight kit

40kg weights

Greasing kit

Unique scalloped disc leads a plain disc which opens up the seeding slot

Double disc drill with proven Duncan know-how, strength and reliability

Small and large seed settings as well as high and low speed range

The 1400L hopper is split 50/50, with concealed distributor heads and fertiliser screen

Electronic hectare metre to measure fan speed, area sown and ground speed

Optional Manutec press wheels close the slots, retain moisture and helps seed-to-soil contact

